

MODEL ER34615M

International size reference:UM1/R20/D



Green Energy
Power Solution Expert

Technical data


- Nominal capacity(at 10 mA +23°C 2V cut off) 14.5Ah
- Rated voltage 3.6V
- Maximum recommended continuous current 2000mA
- Maximum pulse current capability 3000mA
- Operating temperature range -55°C~+85°C
- Weight Approx 107g
- Storage temperature (recommended) +30°C

Unit:mm


Main applications

- Utility metering
- Automatic meter reading
- Tollgate systems
- Alarms and security devices
- Memory back-up
- Tracking systems
- Automotive electronics
- Professional electronics


Discharge performance (25°C)

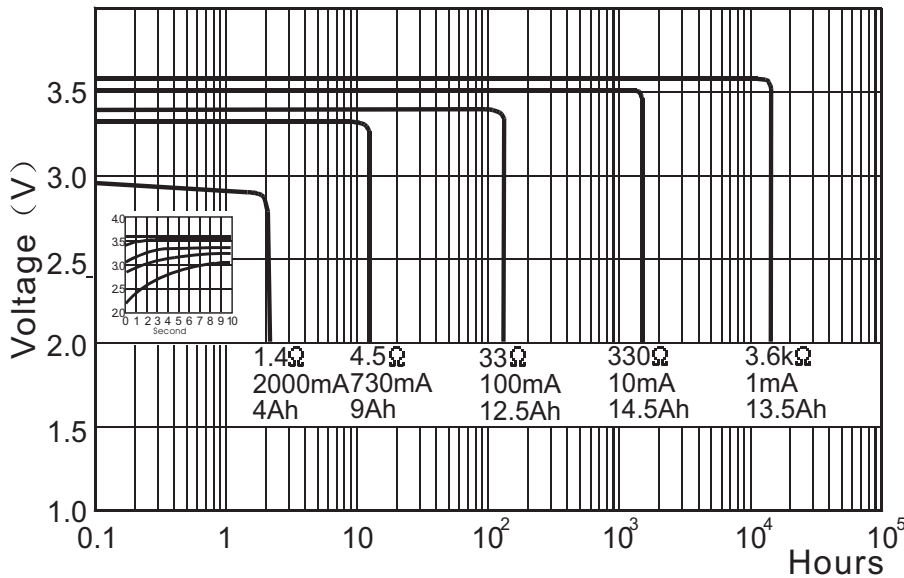

Capacity VS Current

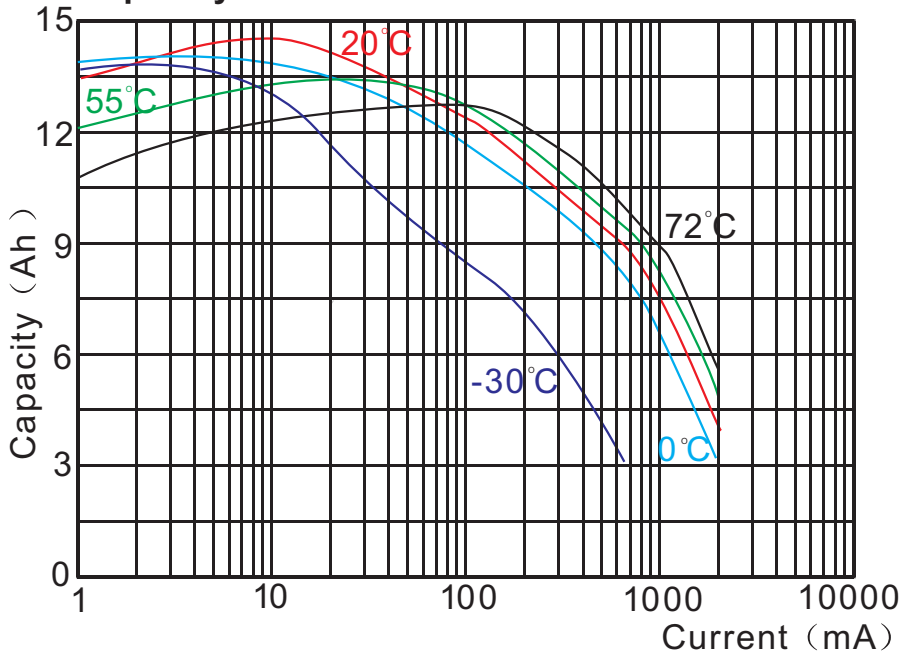

Voltage VS Temperature

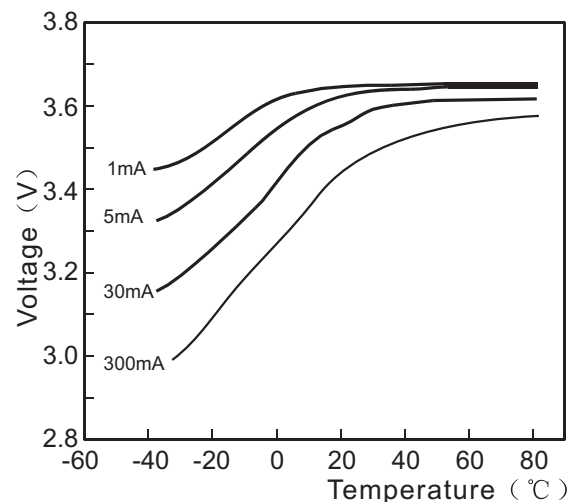

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev.A/AL20